


Modular foundation tie clamp

for every foundation width

Benefits

- Delivered as roll the perforated tie can be cut at any foundation width.
- Simple installation with the Modular Universal Formwork. The Modular foundation tie clamp will be attached to every panel joint without any additional parts.
- Less work space necessary in comparison to assembly with tie rods. Reduced earthwork operations with less excavations and fill-ups.
- With the use of the foundation tie clamp below the formwork there is no collision with existing reinforcement or other already mounted parts.
- Crossing installation is also possible with block foundations.

max. concrete height	max. distance between perforated tie
75 cm	150 cm
100 cm	125 cm
125 cm	100 cm

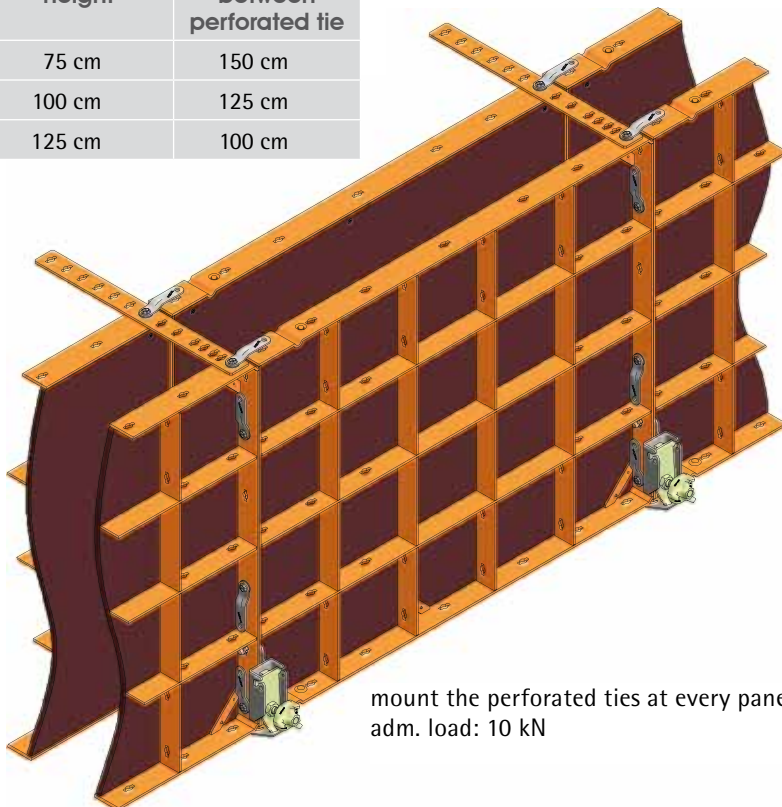

mount the perforated ties at every panel joint
adm. load: 10 kN

Installation sequence:



Insert



Turn – Final position

The foundation tie clamp is simple to install: to mount in the second keyhole from bottom – turn until it touches the panel frame – ready.

www.paschal.de/modular

PASCHAL-Werk G. Maier GmbH · Kreuzbühlstraße 5 · 77790 Steinach · Germany
Phone: +49(0)7832/71-0 · Fax: +49(0)7832/71-209 · service@paschal.de · www.paschal.de

PASCHAL
Service in Formwork + Shoring